


# Mobile Fencing & Security

## Brace construction (1500mm)

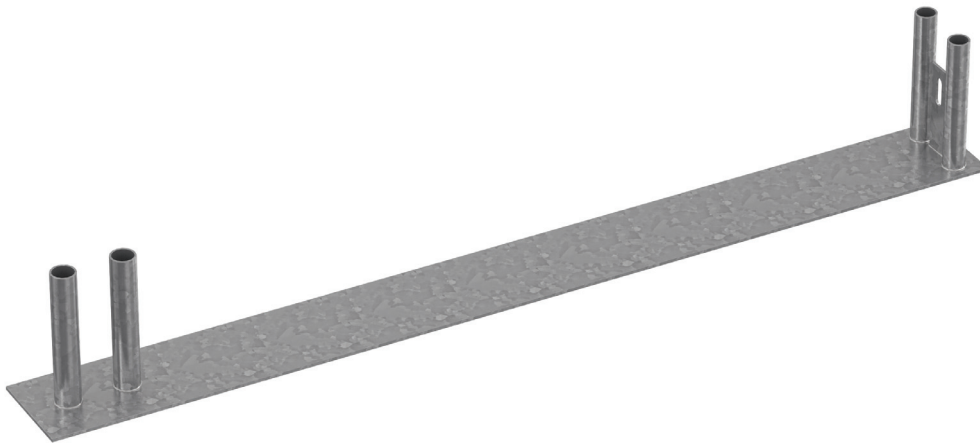

### Specifications

Article Nr.	D0300
Dimension	1500 x 210 x 150 mm
Weight	12 Kg
Package quantity	1

### Maximum stability

A flat metal strip to replace the block and the anti-lift device.

Blocks are placed on the strip for added stability. The brace base construction is mainly advised if maximum stability is required and when using Cityfence. The construction has to be used in combination with a strut tube, couplers and concrete blocks. The base plate has an integrated anti-lift device.

Stable  
Complete  
Safe and secure

Disclaimer. There are no rights to be derived from the technical specification. You should always consider up to 10% tolerance deviations. Heras herewith complies with NEN-EN 10305-3 © Heras.